



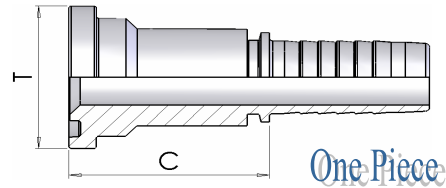


● ● ● ● ● ● Ниппель стандартный / Standard tail


Страница / Page	71	71	72	74
<b>SAE 3000</b>				<b>SAE long drop 3000</b>
	<b>1260</b> 3000 psi SOLID	<b>1060</b> 3000 psi SOLID 90°	<b>1160</b> 3000 psi SOLID 45°	
				<b>FS3L</b> 3000 psi SOLID 90°

Dimensions and general characteristics may be changed at any time without prior notice.


Data contained herein are for information purpose only, and it does not enlarge, amend or imply any warranty other than provided by us with the product  
Any use of the product not in conformance with our instructions may be dangerous.

**1260 Фланец SEA 3000 PSI прямой**
**(SFL)** Straight SAE Flange 3000 PSI


part number	hose I.D.		dash size	Dimension		
	in	mm		flangia		cut-off
				T	mm	C
1260-08-08	1/2	12,7	08	1/2	30,2	45
1260-08-12	1/2	12,7	08	3/4	38.1	50
1260-10-08	5/8	15,9	10	1/2	30,2	45
1260-10-12	5/8	15,9	10	3/4	38.1	49
1260-12-12	3/4	19	12	3/4	38.1	50
1260-12-16	3/4	19	12	1	44.5	53
1260-16-16	1	25,4	16	1	44.5	54
1260-16-20	1	25,4	16	1.1/4	50.8	57
1260-20-20	1.1/4	31,8	20	1.1/4	50.8	59
1260-20-24	1.1/4	31,8	20	1.1/2	60.3	62
1260-24-24	1.1/2	38,1	24	1.1/2	60.3	62
1260-24-32	1.1/2	38,1	24	2	71.4	67
1260-32-32	2	50,8	32	2	71.4	68
1260-32-40	2	50,8	32	2.1/2	84.1	76

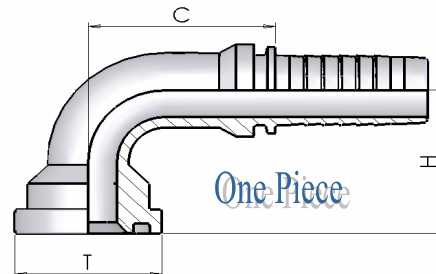
**1060 Фланец SEA 3000 PSI 90°**
**(SFL 90°)** 90° SAE Flange 3000 PSI


part number	hose I.D.		dash size	Dimension			
	in	mm		flangia		drop	cut-off
				T	mm	H	C
1060-08-08	1/2	12,7	08	1/2	30,2	39	39
1060-08-12	1/2	12,7	08	3/4	38.1	44	39
1060-10-08	5/8	15,9	10	1/2	30,2	42	45
1060-10-12	5/8	15,9	10	3/4	38.1	47	45
1060-12-12	3/4	19	12	3/4	38.1	53	56
1060-12-16	3/4	19	12	1	44.5	58	56
1060-16-16	1	25,4	16	1	44.5	65	70
1060-16-20	1	25,4	16	1.1/4	50.8	70	70
1060-16-24	1	25,4	16	1.1/2	60.3	71	72
1060-20-20	1.1/4	31,8	20	1.1/4	50.8	77	86
1060-20-24	1.1/4	31,8	20	1.1/2	60.3	81	85
1060-24-24	1.1/2	38,1	24	1.1/2	60.3	89	98
1060-24-32	1.1/2	38,1	24	2	71.4	97	93
1060-32-32	2	50,8	32	2	71.4	121	123

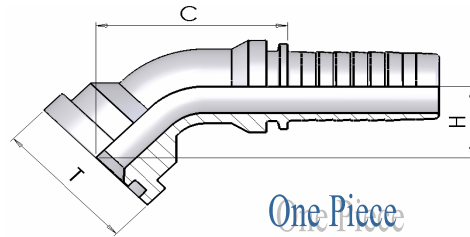**1160      Фланец SEA 3000 PSI 45°**
**(SFL 45)**      45° SAE Flange 3000 PSI


One Piece

part number	hose I.D.		Dimension				
			dash size	flangia		drop	cut-off
	in	mm		T	mm	H	C
<b>1160-08-08</b>	1/2	12,7	08	1/2	30,2	22	62
<b>1160-08-12</b>	1/2	12,7	08	3/4	38.1	25	67
<b>1160-12-12</b>	3/4	19	12	3/4	38.1	27	69
<b>1160-12-16</b>	3/4	19	12	1	44.5	30	88
<b>1160-16-16</b>	1	25,4	16	1	44.5	33	82
<b>1160-16-20</b>	1	25,4	16	1.1/4	50.8	37	108
<b>1160-20-20</b>	1.1/4	31,8	20	1.1/4	50.8	38	102
<b>1160-20-24</b>	1.1/4	31,8	20	1.1/2	60.3	39	129
<b>1160-24-24</b>	1.1/2	38,1	24	1.1/2	60.3	45	113
<b>1160-24-32</b>	1.1/2	38,1	24	2	71.4	47	148
<b>1160-32-32</b>	2	50,8	32	2	71.4	58	130

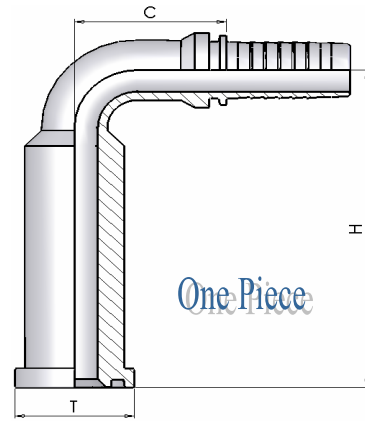**FS3L    Фланец 90° SAE 3000 PSI - удлиненный**
**(SFL 90°L)**    90° SAE Flange 3000 Psi - Long Drop


part number	hose I.D.		Dimension				
			dash size	flangia		drop	cut-off
	in	mm		T	mm	H	C
<b>FS3L-08-08</b>	1/2	12,7	08	1/2	30,2	73	39
<b>FS3L-12-12</b>	3/4	19	12	3/4	38.1	123	56
<b>FS3L-16-16</b>	1	25,4	16	1	44.5	127	70
<b>FS3L-20-20</b>	1.1/4	31,8	20	1.1/4	50.8	178	85
<b>FS3L-24-24</b>	1.1/2	38,1	24	1.1/2	60.3	220	99


● ● ● ● ● ● Ниппель спиральный рукав / Multispiral tail

Страница / Page

12

12


13



**1250M**

3000 psi SOLID


**SFL**



**1050M**

3000 psi SOLID 90°

**SFL 90°**




**1150M**

3000 psi SOLID 45°


**SFL 45°**

**Dimensions and general characteristics may be changed at any time without prior notice.**

Data contained herein are for information purpose only, and it does not enlarge, amend or imply any warranty other than provided by us with the product  
Any use of the product not in conformance with our instructions may be dangerous.

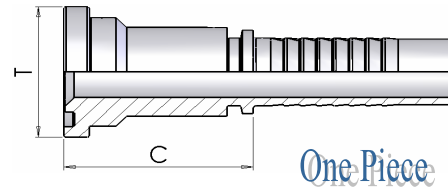
**1250M Фланец SEA 3000 PSI прямой**
**(SFL)** Straight SAE Flange 3000 PSI


part number	hose I.D.		Dimension				
			dash size	flange		cut-off	
	in	mm		T	mm	C	C
1250M08-08	1/2	12,7	08	1/2	30,2		46
1250M08-12	1/2	12,7	08	3/4	38.1		50
1250M10-12	5/8	15,9	10	3/4	38.1		50
1250M12-12	3/4	19	12	3/4	38.1		51
1250M12-16	3/4	19	12	1	44.5		54
1250M16-16	1	25,4	16	1	44.5		56
1250M16-20	1	25,4	16	1.1/4	50.8		59

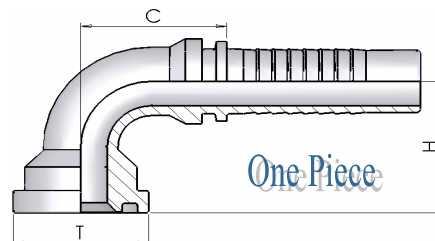**1050M Фланец SEA 3000 PSI 90°**
**(SFL 90°)** 90° SAE Flange 3000 PSI






part number	hose I.D.		Dimension				
			dash size	flange		drop	cut-off
	in	mm		T	mm	H	C
1050M08-08	1/2	12,7	08	1/2	30,2	39	40
1050M08-12	1/2	12,7	08	3/4	38.1	44	40
1050M10-12	5/8	15,9	10	3/4	38.1	47	46
1050M12-12	3/4	19	12	3/4	38.1	53	58
1050M12-16	3/4	19	12	1	44.5	58	58
1050M16-16	1	25,4	16	1	44.5	65	72
1050M16-20	1	25,4	16	1.1/4	50.8	70	72

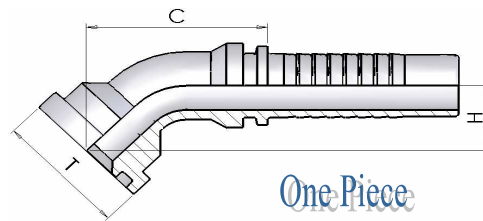**1150M**    **Фланец SEA 3000 PSI 45°**  
**(SFL 45)**    45° SAE Flange 3000 PSI



part number	hose I.D.		Dimension				
			dash size	flange		drop	cut-off
	in	mm		T	mm	H	C
<b>1150M08-08</b>	1/2	12,7	08	1/2	30,2	22	63
<b>1150M08-12</b>	1/2	12,7	08	3/4	38.1	25	69
<b>1150M10-12</b>	5/8	15,9	10	3/4	38.1	24	70
<b>1150M12-12</b>	3/4	19	12	3/4	38.1	27	84
<b>1150M12-16</b>	3/4	19	12	1	44.5	30	88
<b>1150M16-16</b>	1	25,4	16	1	44.5	33	106
<b>1150M16-20</b>	1	25,4	16	1.1/4	50.8	37	110

● ● ● ● ● ● **Ниппель Inter-lock / Inter-lock tail**

	13	13	14
			
	<b>1250H</b>	<b>1050H</b>	<b>1150H</b>
	3000 psi SOLID	3000 psi SOLID 90°	3000 psi SOLID 45°
	<b>SFL</b>	<b>SFL 90°</b>	<b>SFL 45°</b>


**Dimensions and general characteristics may be changed at any time without prior notice.**

Data contained herein are for information purpose only, and it does not enlarge, amend or imply any warranty other than provided by us with the product  
Any use of the product not in conformance with our instructions may be dangerous.



## 1250H Фланец SEA 3000 PSI прямой


(SFL) Straight SAE Flange 3000 PSI

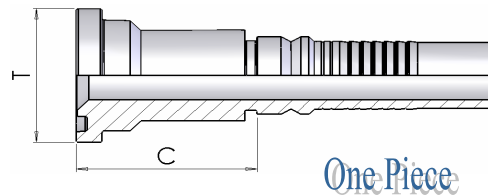

part number	hose I.D.		Dimension			
			dash size	flange		cut-off C
	in	mm		T	mm	
1250H12-12	3/4	19	12	3/4	38.1	47
1250H12-16	3/4	19	12	1	44.5	50
1250H16-16	1	25,4	16	1	44.5	52
1250H16-20	1	25,4	16	1.1/4	50.8	55
1250H20-20	1.1/4	31,8	20	1.1/4	50.8	56
1250H20-24	1.1/4	31,8	20	1.1/2	60.3	59
1250H24-24	1.1/2	38,1	24	1.1/2	60.3	60
1250H24-32	1.1/2	38,1	24	2	71.4	65
1250H32-32	2	50,8	32	2	71.4	67

## 1050H Фланец SEA 3000 PSI 90°


(SFL 90°) 90° SAE Flange 3000 PSI

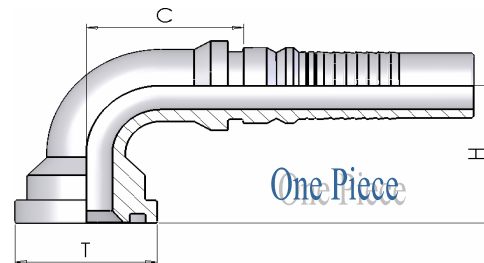

part number	hose I.D.		Dimension				
			dash size	flange		drop H	cut-off C
	in	mm		T	mm		
1050H12-12	3/4	19	12	3/4	38.1	52	52
1050H12-16	3/4	19	12	1	44.5	56	55
1050H16-16	1	25,4	16	1	44.5	65	73
1050H16-20	1	25,4	16	1.1/4	50.8	75	69
1050H20-20	1.1/4	31,8	20	1.1/4	50.8	78	93
1050H20-24	1.1/4	31,8	20	1.1/2	60.3	80	97
1050H24-24	1.1/2	38,1	24	1.1/2	60.3	95	100
1050H24-32	1.1/2	38,1	24	2	71.4	101	134
1050H32-32	2	50,8	32	2	71.4	121	122

**1150H**    **Фланец SEA 3000 PSI 45°**

**(SFL 45°)**    45° SAE Flange 3000 PSI

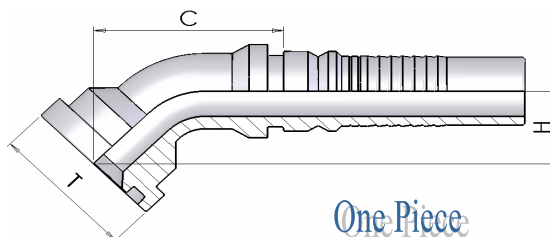

One Piece

part number	hose I.D.		Dimension				
			dash size	flange		drop	cut-off
	in	mm		T	mm	H	C
1150H12-12	3/4	19	12	3/4	38.1	25	81
1150H12-16	3/4	19	12	1	44.5	28	86
1150H16-16	1	25,4	16	1	44.5	35	107
1150H16-20	1	25,4	16	1.1/4	50.8	37	113
1150H20-20	1.1/4	31,8	20	1.1/4	50.8	37	136
1150H20-24	1.1/4	31,8	20	1.1/2	60.3	40	136
1150H24-24	1.1/2	38,1	24	1.1/2	60.3	44	159
1150H24-32	1.1/2	38,1	24	2	71.4	47	159
1150H32-32	2	50,8	32	2	71.4	56	182